

# BR-355

## GPS Receiver

- SiRF Star III
- 20-Channel All-In-View-Tracking
- NMEA 0183
- WAAS/EGNOS Support
- 2.08" x 0.75"
- Built-in Supercap For Rapid Acquisition
- Built-in GPS Patch Antenna
- Built-in Roof Mount Magnet
- USB or RS232/ PS/2 Interface Cable Sets Available



The BR-355 GPS Receiver can be utilized in a variety of applications which require GPS signals to be received and decoded in your Windows laptop or tablet, and for Mac users, iBooks or Powerbooks. Compatible with most NMEA compliant third-party software, the BR-355 is suitable for use in vehicle, marine and aviation navigation, as well as commercial and municipality applications such as fire trucks, police cars, buses, GIS data collection and much more!

The BR-355's slim profile housing is completely waterproof and incorporates an active patch antenna for the highest level of GPS accuracy. With a 60" cable, placement of the GPS receiver within the vehicle is not critical, however in those rare occurrences when towering high-rises offer challenging satellite reception, simply place the BR-355 on the vehicle's roof (attaches via its built-in magnet) for improved performance. Since power and data are transferred through the BR-355's USB cable, there's no need for batteries or any other external power source.

## Serial GPS Receiver

### General Specifications

GPS Chipset.....SiRF Star III e/LP  
 Frequency.....L1, 1575.42 MHZ  
 C/A Code.....1.023 MHz chip rate  
 Channels.....20 all-in-view tracking  
 Sensitivity.....-159 dBm  
 Accuracy.....5m 2D RMS WAAS enabled  
 10m 2D RMS WAAS disabled

### Aquisition Rate

Hot start.....1 sec., average  
 Warm start.....38 sec., average  
 Cold start.....42 sec., average  
 Reacquisition.....0.1 sec. average

### Protocol

GPS Protocol.....Default: NMEA 0183 (Secondary: SiRF binary)  
 GPS Output Data.....SiRF binary >> position, velocity, altitude, status and control NMEA 0183 V2.2 protocol, and supports command: GGA, GSA, GSV, RMC, VTG, GLL v2.2 (VTG and GLL are optional)  
 GPS transfer rate.....Software command setting (Default : 4800,n,8,1 for NMEA )

### Dynamic Condition

Acceleration Limit.....Less than 4g  
 Altitude Limit.....60,000 Feet (18,000 meters) max.  
 Velocity Limit.....1,000/sec. (515 meters) max.  
 Jerk Limit.....20 m/sec\*\*3

### Environmental Specifications

Operating.....-40~ 185°F (-40~ 85°C)  
 Storage.....-40~ 185°F (-40~ 85°C)  
 Humidity.....Up to 95% non-condensing


### Physical Characteristics

Dimension.....2.08" x 0.75" (53mm x 19.2mm)  
 Serial Cable Length.....58" (147 cm)  
 Weight.....2.2 Ounces (62.37 g)

### Carton Specifications

Quantity Per Box.....50  
 Carton Weight.....26lbs  
 Carton Dimensions.....29" x 16" x 12" ( 736.6mm x 406.4mm x 304.8mm)


## PACKAGE CONTENTS:



PS/2 Mini DIN 6-Pin Male Connector

Color	Function	Pin
Black	GND	1
Red	VCC	2
Yellow	N/C	3
White	RX	4
Green	TX	5
---	N/C	6

## Optional Cable Set Adapters

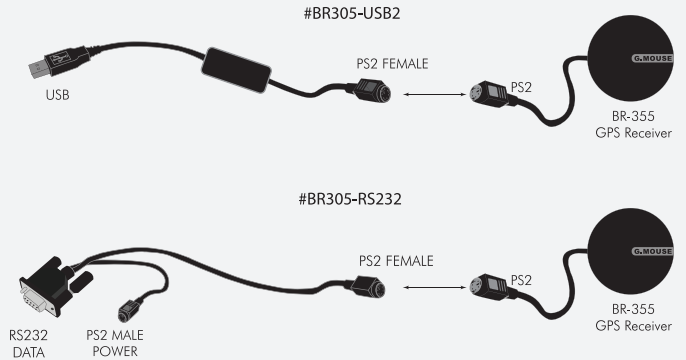

	<b>ADAPTERS</b>	
	<b>20 CHANNEL</b>	<b>WIN</b>
<b>SERIAL</b>	<b>SIRF III</b>	<b>MAC</b>

**Taiwan**  
 GLOBALSAT INCORPORATED  
 16F, No. 186, Jian Yi Road, Chung Ho City  
 Taipei Hsien, Taiwan  
 T: +866-2-82263799 F: +866-2-82263899  
 globalsat.com.tw service@globalsat.com.tw

**North America**  
 USGLOBALSAT, INC.  
 14740 Yorba Court  
 Chino, CA 91710  
 T: +909-597-8525 F: +909-597-8532  
 usglobalsat.com sales@usglobalsat.com

CE FC Canada 210 Bluetooth Made in Taiwan  
**GLOBALSAT TECHNOLOGY CORPORATION**  
 ©2009 Globalsat Technology Corporation. All rights reserved.  
 All trademarks, tradenames & brands are registered to their respective owners.

BR355-DS12212011G